



# Kaye Log

COLD CHAIN MONITORING DURING TRANSPORT

WIRELESS AND AFFORDABLE TEMPERATURE MONITORING ON A TINY DEVICE

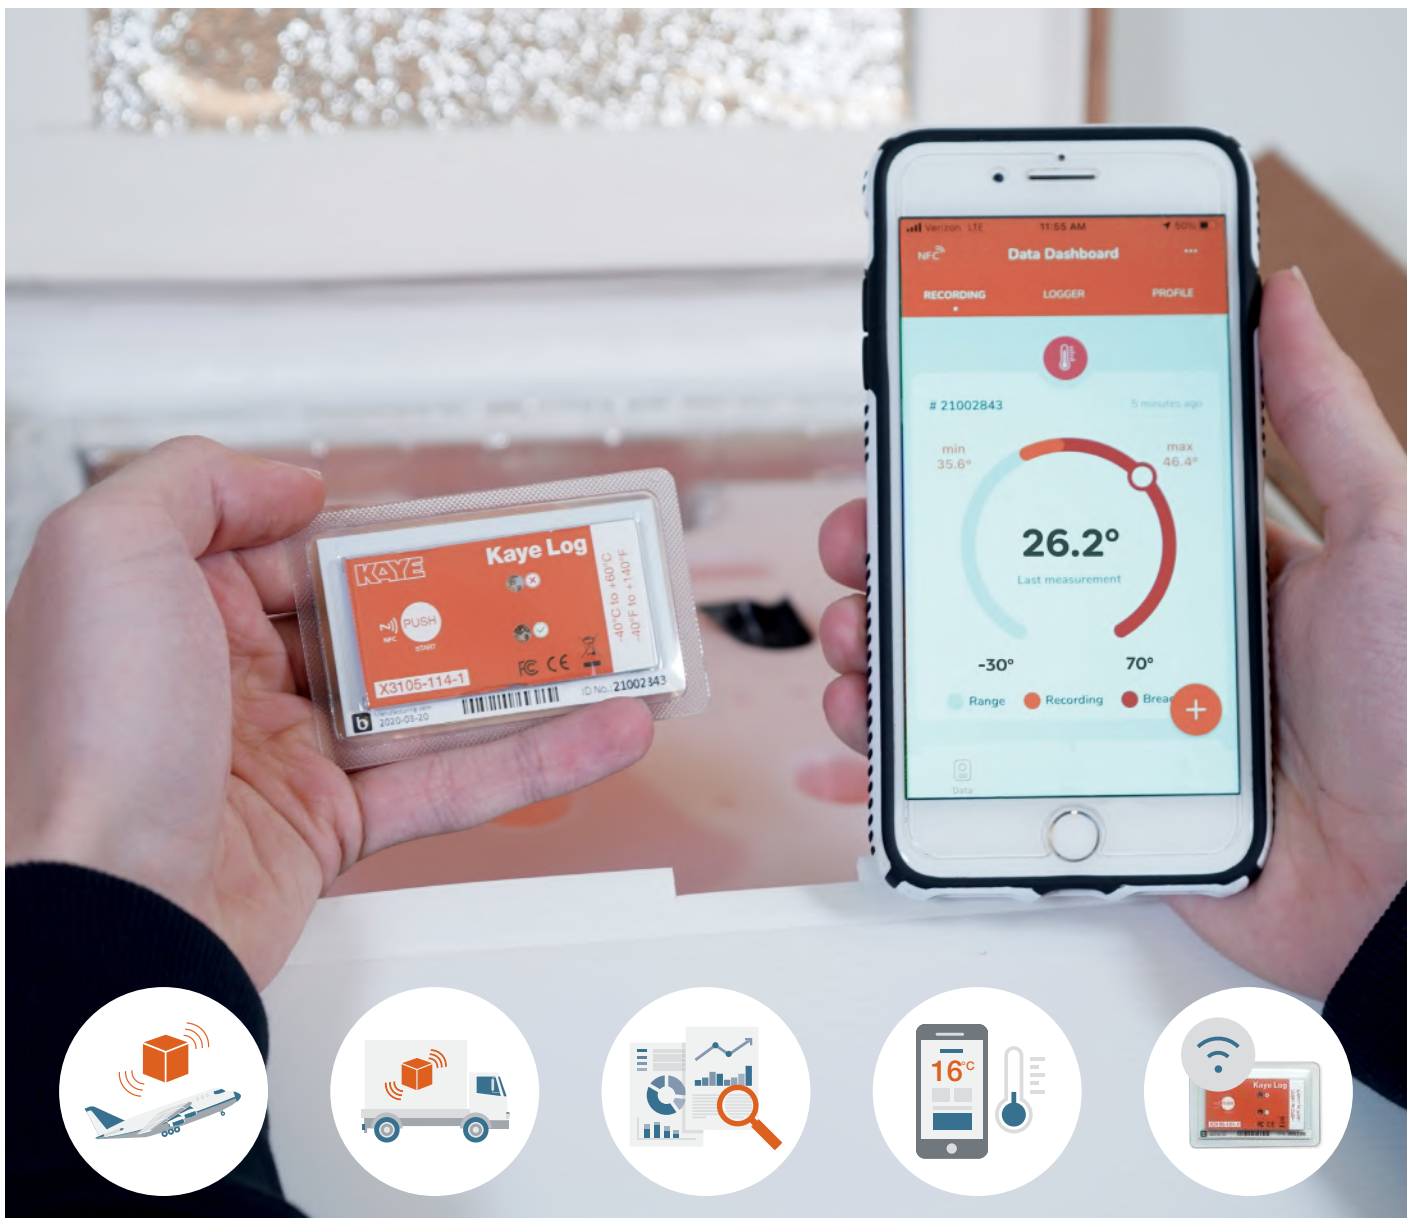


# Monitor your Sensitive Product Shipment on your Smartphone

## WHAT IS NFC TECHNOLOGY?

NFC – Near Field Communication allows contactless communication between devices like smartphones or other enabled devices. No matter where you are – with just one swipe on your NFC Technology equipped device it is now possible to instantly read, send and receive alerts.

## ALL-IN-ONE SOLUTION FOR TRANSPORTING YOUR TEMPERATURE-SENSITIVE PRODUCTS

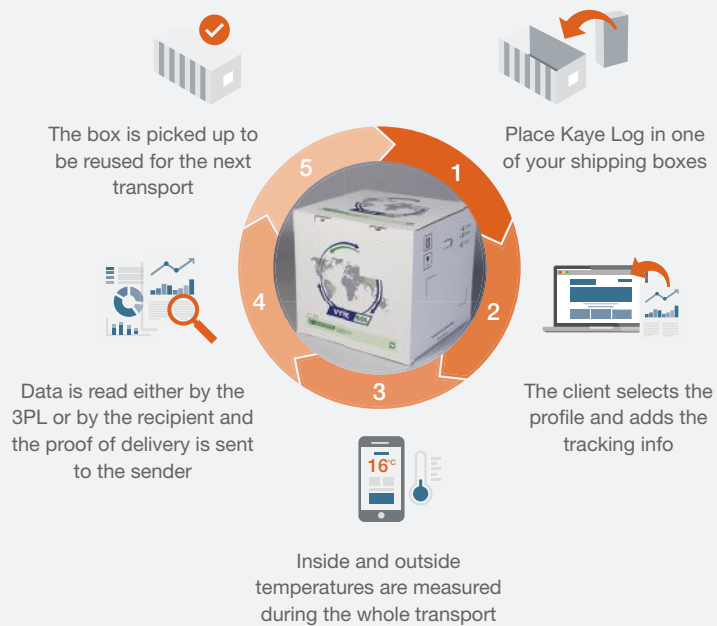

## UP TO 90% REDUCTION OF TIME SPENT IN OPERATIONS

### NFC

- Fast and secure data transfer with any NFC enabled mobile device.
- Eliminates the need to remove device from shipment.

### Accurate and Robust

- Reliable measurement technology, electronic certificates included with each logger.

### Alert LEDs

- Instant visual notification if thresholds have been breached.

### Logistics Simplified

- Only 2.5mm thick, easily integrates into any packaging.
- Label can be programmed with any shipment and product information.

### Cloud Security

- Encrypted data transfer to the secure cloud.
- Access protected by user accounts.

### Affordable, Single and Multiuse

- Different versions ranging from 36 days to 1 year of use.

# Protecting your Pharma Shipments

The Kaye Log NFC Data Logger enables full temperature traceability during the transport of temperature, or temperature/humidity sensitive products. Upon arrival of the package, a go/no go LED (that can be personalized) indicates immediately if the cold chain has been breached. All temperature/humidity history can be directly accessed from any smartphone equipped with the NFC technology along with GPS and shipping information.



## LOADING/PACKAGING

- Loggers, pre-programmed with all the stability info are integrated with products
- Logger's ID is paired with ID of the product/shipment
- Easy integration with serialization, tracking and quality platforms
- Possibility to add logistics and product info



## TRANS-SHIPMENT/IMPORT

- Logistic agents can check parameters via NFC without opening the box/pallet
- Current temperature/geolocation info is sent to the client, allowing pro-activity



## DELIVERY

- PDF report is generated automatically upon reading of data
- All the data is uploaded to the cloud
- The sender gets an automatic proof of delivery

# Kaye Log NFC X3105 Series Temperature Data Logger


AVAILABLE AS SINGLE USE (36/100 DAYS) OR REUSABLE (1 YEAR)

## FEATURES

- Temperature measurement
- Sensirion® calibrated sensor
- Temperature range: -40°C to +60°C
- Resolution: 0.1°C
- NFC
- Internal battery
- Quick and easy installation
- Maintenance-free
- Resistant to weather conditions
- Resistant to mechanical damage
- IP 67
- Compliant with norms:
  - CE
  - HACCP
  - ETSI 300220
  - FCC

## TECHNICAL SPECIFICATIONS - X3105

Temperature unit	°C
Temperature Range	-40°C to 60°C
Accuracy	From 0°C to +30°C typically +/- 0.2°C; +/- 0.5°C for the rest
Validity	part #: X3105-111-1/36 days single use part #: X3105-121-1/100 days single use part #: X3105-114-1/1 year reusable
Intervals	10 minutes default. Modifications start from 1 minute with resolution of 1 second
Memory	5.000 records
IP	67
Power Supply	Internal battery
Dimensions	85mm x 50mm x 5mm
Weight	10g
Necessary equipment	NFC reader, smartphone or tablet with NFC

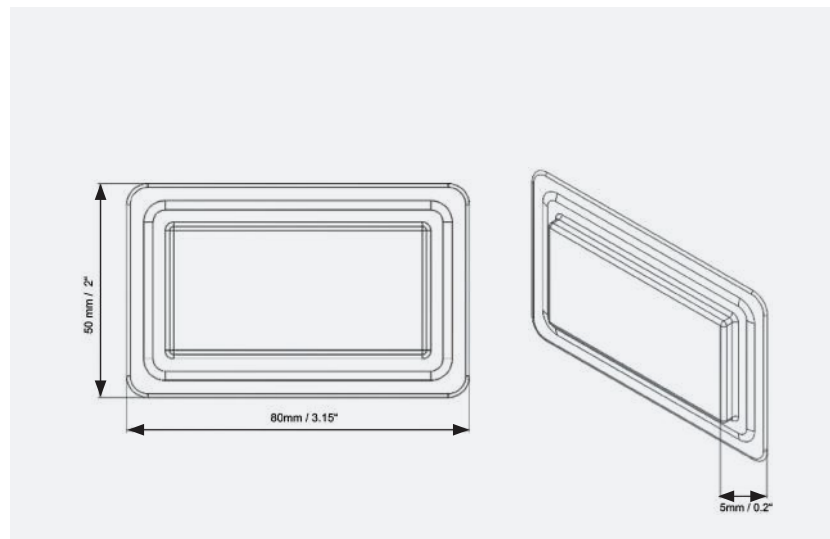


# NFC X3106 Temperature Logger with External Probe

## LOGGER CHARACTERISTICS

- Temperature measurement
- Sensirion® calibrated sensor
- Sensor attached on external probe
- Probe length and shape can be customized (default 1 meter)
- Temperature range: -40°C to +120°C
- Resolution: 0.1°C
- NFC depending on logger
- Internal battery
- Quick and easy installation
- Maintenance-free
- Resistant to weather conditions
- Resistant to mechanical damage
- IP 44
- Compliant with norms:
  - CE
  - HACCP
  - ETSI 300220
- Logger holder provided

## TECHNICAL SPECIFICATIONS - X3106

Temperature unit	°C
Temperature Range	-40°C to 120°C
Accuracy	From 0°C to +30°C typically +/- 0.2°C; +/- 0.5°C for the rest
Validity	part #: X3106-111-1/36 days single use part #: X3106-121-1/100 days single use part #: X3106-114-1/1 year reusable
Resolution	0.1°C
Intervals	10 minutes default. Modifications start from 1 minute with resolution of 1 second
Memory	5.000 samples
IP	44
Power Supply	Internal battery
Dimensions	85mm x 54mm x 5mm
Weight	30g
Necessary equipment	NFC reader, smartphone or tablet with NFC

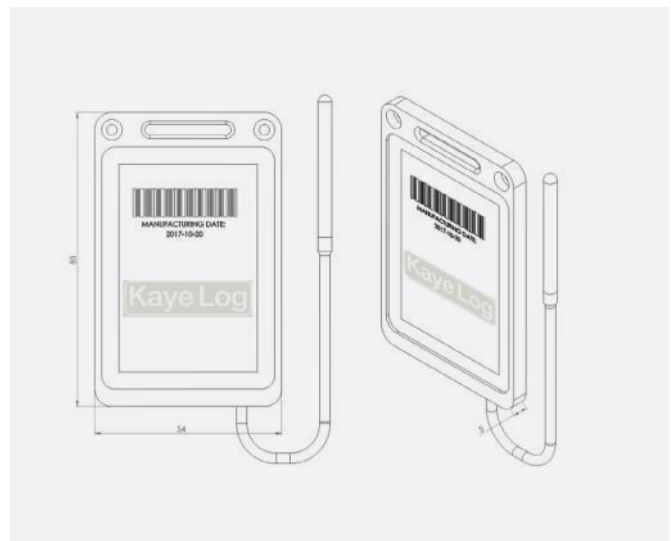


# NFC X3110 Temperature and Humidity Data Logger

## FEATURES

- Temperature measurement
- Sensirion® calibrated sensor
- Temperature range: -30°C to +70°C
- Humidity range: 0% to 100%
- Resolution: 0.1°C
- NFC
- Internal battery
- Quick and easy installation
- Maintenance-free
- Resistant to weather conditions
- Resistant to mechanical damage
- IP 44
- Compliant with norms:
  - CE
  - HACCP
  - ETSI 300220
- Logger holder provided

## TECHNICAL SPECIFICATIONS - X3110

Temperature unit	°C
Temperature Range	-30°C to 70°C
Humidity Range	0% to 100%
Accuracy	From 20% to 80% typically +/- 2%
Validity	part #: X3110-111-1/36 days single use part #: X3110-121-1/100 days single use part #: X3110-114-1/1 year reusable
Resolution	0.1°C
Intervals	10 minutes default. Modifications start from 1 minute with resolution of 1 second
Memory	5.000 records
IP	44
Power Supply	Internal battery
Dimensions	85mm x 54mm x 5mm
Weight	30g
Necessary equipment	NFC reader, smartphone or tablet with NFC

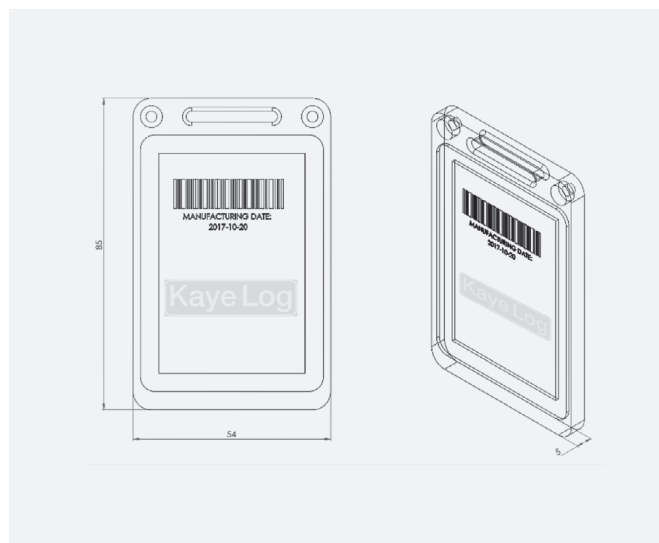

# NFC USB Reader

THE NFC USB READER ALLOWS THE USER TO PROGRAM AND READ DATA FROM THE NFC LOGGERS ON A COMPUTER RUNNING WINDOWS.

Kaye NFC allows you to create a profile with your recording settings (min. and max. temperatures, frequency, etc.) and apply this profile to one or more NFC loggers. Simply follow the software instructions – position your loggers on the reader to program them quickly. The NFC USB Reader, combined with Kaye NFC Software saves you time by allowing you to scan an entire pack of loggers at one time and download data from them.



# NFC Android Reader

THE FIRST PROFESSIONAL ANDROID-BASED NFC DEVICE DESIGNED TO MEET B2B EXPECTATIONS.

## FEATURES

- Android based – as flexible as a smartphone
- Highly mobile – lightweight, pocket-sized and connected
- Managed over the air – centralized and secure OTA device management platform
- Dedicated device – can be dedicated to a single application
- Secure by design – embedded SE/SAM for the highest security



**Visit our website:**

**Kaye representative contact:**

**Request a demo:**

## EUROPE, MIDDLE EAST, AFRICA AND ASIA

Amphenol Advanced Sensors Germany GmbH  
Sinsheimer Strasse 6  
D-75179 Pforzheim

**T:** +49 (0) 7231-14 335 0

**F:** +49 (0) 7231-14335 29

**Email:** [kaye@amphenol-sensors.com](mailto:kaye@amphenol-sensors.com)  
[www.kayeinstruments.com](http://www.kayeinstruments.com)

## USA/AMERICAS

Amphenol Thermometrics, Inc.  
967 Windfall Road  
St. Marys, PA 15857

**T:** +1(814) 834-9140

**F:** +1(814) 781-7969

**Email:** [kaye-us@amphenol-sensors.com](mailto:kaye-us@amphenol-sensors.com)  
[www.kayeinstruments.com](http://www.kayeinstruments.com)

## INDIA

Amphenol Interconnect India Pvt Ltd.  
Plot no. 6, Survey No.64  
Software Units layout

MAHAVEER TECHNO PARK

Hitech City, Madhapur

Hyderabad, Telangana – 500081

**T:** +91 40 33147100

**Email:** [kaye-india@amphenol-sensors.com](mailto:kaye-india@amphenol-sensors.com)  
[www.kayeinstruments.com](http://www.kayeinstruments.com)

## CHINA

Amphenol (Changzhou) Connector Systems Co., Ltd  
Building 10, Jintong Industrial Park,  
No. 8 Xihu Road, Wujin High-Tech Development Zone,  
Changzhou, Jiangsu 213164

**T:** 0086-519-83055197

[www.kayeinstruments.com](http://www.kayeinstruments.com)

AAS-BRK-10001-D



**Warranty and disclaimer:** The information mentioned on documents are based on our current tests, knowledge and experience. Because of the effect of possible influences in an application of the product, they do not exempt the user from their own tests, checks and trials. A guarantee of certain properties or a guarantee for the proper suitability of the product for a specific, especially permanent application can not be derived from our data. Liability is therefore excluded to that extent permitted by law. Any proprietary rights of third parties as well as existing laws and regulations must be observed by the recipient of the product on his own responsibility.

© 2022 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.